
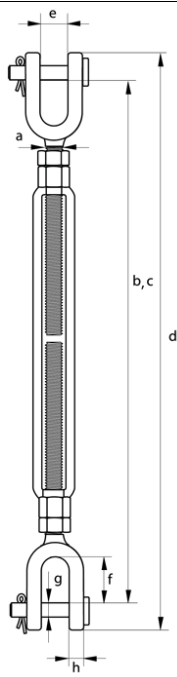


**FISA TEHNICA PENTRU PRODUSUL
INTINZATORI ZINCATI LA CALD TIP FURCA-FURCA CU SIGURANTA - TIP GPO**

Norma: ASTM F1145-92 (versiunea actualizata a US Fed.Spec.FF-T-791B)
 Material : otel rezistenta ridicata
 Clasa de rezistenta: 5
 Acoperire: corpul forjat, zincat la cald

	Dimensiune [inch]	Caracteristici dimensionale [mm]						Portanta WLL [kg]
		L min, mm (b)	Lmax, mm(c)	d [mm]	e [mm]	g[mm]	h[mm]	
	3/4 x 6	368	487	438	24	38	16	2360
	3/4 x 9	442	639	512	24	38	16	
	3/4 x 12	518	791	588	24	38	16	
	3/4 x 18	671	1095	740	24	38	16	
	7/8 x 12	559	825	636	27	42	19	3270
	7/8 x 18	712	1131	789	27	42	19	
	1 x 6	447	555	532	30	50	20	4540
	1 x 12	598	859	683	30	50	20	
	1 x 18	750	1164	835	30	50	20	
	1 x 24	902	1469	987	30	50	20	
	1 1/4 x 12	641	916	748	44	71	26	6890
	1 1/4 x 18	793	1218	900	44	71	26	
	1 1/4 x 24	961	1538	1069	44	71	26	
	1 1/2 x 12	675	941	806	52	71	28	9710
	1 1/2 x 18	825	1244	956	52	71	28	
	1 1/2 x 24	980	1550	1111	52	71	28	
1 3/4 x 18	933	1310	1095	59	86	33	12700	
1 3/4 x 24	1084	1614	1246	59	86	33		
2 x 24	1153	1672	1338	63	93	41	16780	
2 1/2 x 24	1254	1830	1479	75	114	41	27220	

Intocmit,
Barbulescu Mihaela
25.02.2016